

# Environmental Product Declaration

REPAIR AND RESTORATION COMPOUNDS



# KAUFMAN

Concrete Treatments

Environmental Product Declaration for all Repair and Restoration Compounds  
manufactured by Kaufman Products, Inc. in Baltimore, Maryland USA.



## ADMINISTRATIVE INFORMATION

## International Certified Environmental Product Declaration

<b>Declared Product:</b>	This Environmental Product Declaration (EPD) covers repair and restoration compound products produced by Kaufman Products Inc. Declared unit: 1 kg of repair and restoration compound product	
<b>Declaration Owner:</b>	Kaufman Products Inc. 3811 Curtis Avenue Baltimore, Maryland www.kaufmanproducts.net	<b>KAUFMAN</b> Concrete Treatments
<b>Program Operator:</b>	Labeling Sustainability 1800 Vine St. Los Angeles, CA 90028 www.labelingsustainability.com	 <b>LABELING</b> sustainability
<b>Product Category Rule:</b>	ISO 21930:2017 Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services PCR Program Operator: International Organization for Standardization PCR review was conducted by: Technical Committee: ISO/TC 59/SC 17 Sustainability in buildings and civil engineering works	
<b>Independent LCA Reviewer and EPD Verifier:</b>	This declaration was independently verified in accordance with ISO 14025:2006 Independent verification of the declaration, according to ISO 14025:2006 Internal <input type="checkbox"/> ; External <input checked="" type="checkbox"/> X Third Party Verifier Geoffrey Guest, Certified 3rd Party Verifier under Labeling Sustainability Program ( <a href="http://www.labelingsustainability.com">www.labelingsustainability.com</a> ), CSA Group ( <a href="http://www.csaregistries.ca">www.csaregistries.ca</a> )	
<b>Date of Issue:</b>	28 November 2023	
<b>Period of Validity:</b>	5 years; valid until 28 November 2028	
<b>EPD Number:</b>	b45df55c-f3ee-4af9-a8fb-4fe03ea77b96	



## TABLE OF CONTENTS

<b>Administrative Information .....</b>	<b>1</b>
<b>Company Description .....</b>	<b>3</b>
<b>Study Goal.....</b>	<b>3</b>
<b>Description Of Product And Scope .....</b>	<b>4</b>
<b>Repair And Restoration Compounds Design Summary .....</b>	<b>4</b>
<b>Repair And Restoration Compounds Design Composition .....</b>	<b>6</b>
<b>A1 Raw Material Recycled Content And Material Losses .....</b>	<b>9</b>
<b>System Boundaries .....</b>	<b>9</b>
<b>Cut-Off Criteria .....</b>	<b>10</b>
<b>Data Sources And Data Quality Assessment .....</b>	<b>11</b>
Raw Material Transport.....	11
Electricity.....	11
Process/Space Heating.....	11
Fuel Required For Machinery.....	11
Waste Generation .....	11
Recovered Energy .....	11
Recycled/Reused Material/Components.....	11
Module A1 Material Losses.....	11
Direct A3 Emissions Accounting .....	11
<b>Data Quality Assessment.....</b>	<b>13</b>
Precision.....	13
Completeness.....	13
Consistency.....	13
Reproducibility.....	13
Representativeness.....	13
<b>Environmental Indicators And Inventory Metrics.....</b>	<b>14</b>
<b>Total Impact Summary.....</b>	<b>16</b>
<b>Additional Environmental Info .....</b>	<b>19</b>
<b>References .....</b>	<b>20</b>
Iso Standards .....	20
En Standards .....	20
Other References .....	20



## COMPANY DESCRIPTION

Kaufman Products, Inc. offers more than two hundred products for use on new concrete construction projects and restoration and repair work of existing concrete structures. Among the various powders and chemicals manufactured, Kaufman Products offers epoxy adhesives, cementitious and polymer-modified repair mortars, curing compounds, form release agents, coatings, non-shrink grouts, retarders and accelerating agents, curing and sealing compounds, shake-on hardeners, penetrating hardeners, and anchoring materials. In addition, the breadth of its product line continues to grow, allowing its business partners to carry a complete line of products that meet a wide range of needs.

Kaufman Products is specified throughout North America through our long-time business partnerships with the two leading specification programs, SpecLink and MasterSpec. As a result, our brand name is called for routinely on both commercial and residential construction projects. In addition, Kaufman Products actively participates in the National Transportation Product Evaluation Program (NTPEP) through the American Association of State Highway Transportation Officials (AASHTO). As a result, many of our epoxies, repair mortars, grouts, and curing compounds were tested and are approved throughout the United States for use on roadways, bridges, sidewalks, and manufactured concrete products. At present, Kaufman Products has more than six-hundred approvals on these products from the many states and local authorities and is considered to be among the leaders in DOT approved materials throughout the United States.

Kaufman Products remains dedicated to preserving and protecting the environment. While they were perhaps the first company to use safer and greener materials, exemplified by our early adoption of emulsion technology and water-based curing compounds over forty years ago, we continue to pursue our vision of using recycled or waste-stream in our selection of both packaging materials and raw materials. To this end, Kaufman Products uses recycled plastic pails, re-conditioned drums, totes, and restored wood pallets to reduce our environmental impact. Moreover, its product formulations incorporate many waste-stream materials to reduce our environmental impact. Accordingly, Kaufman Products can provide LEED credits related to these decisions.

## STUDY GOAL

The intended application of this life cycle assessment (LCA) is to comply with the procedures for creating a Type III environmental product declaration (EPD) and publish the EPD for public review on the website, [www.labelingsustainability.com](http://www.labelingsustainability.com). This level of study is in accordance with EPD Product Category Rule (PCR) for repair and restoration compound products published by; International Standards Organization (ISO) 14025:2006 Environmental labels and declarations, Type III environmental declarations-Principles and procedures; ISO 14044:2006 Environmental management, Life cycle assessment- Requirements and guidelines; and ISO 14040:2006 Environmental management, Life cycle assessment-Principles and framework. The performance of this study and its subsequent publishing is in alignment with the business-to-business (B2B) communication requirements for the environmental assessment of building products. The study does not intend to support comparative assertions and is intended to be disclosed to the public.

This project report was commissioned to differentiate Kaufman Products Inc. from their competition for the following reasons: generate an advantage for the organization; offer customers information to help them make informed product decisions; improve the environmental performance of Kaufman



Products Inc. by continuously measuring, controlling and reducing the environmental impacts of their products; help project facilitators working on Leadership in Energy and Environmental Design (LEED) projects achieve their credit goal; and to strengthen Kaufman Products Inc.'s license to operate in the community. The intended audience for this LCA report is Kaufman Products Inc.'s employees, their suppliers, project specifiers of their products, architects, and engineers. The EPD report is also available for policy makers, government officials interested in sustainability, academic professors, and LCA professionals. This LCA report does not include product comparisons from other facilities.

## DESCRIPTION OF PRODUCT AND SCOPE

Concrete Repair & Restoration products include many variations. Among these are cementitious repair mortars and polymer modified repair mortars. Of the polymer modified repair mortars, there are several that are modified with a dry latex polymer, while many others are enhanced with a variety of other polymers to reduce shrinkage and provide resistance to freeze-thaw cycling. Key features of the products in this study include: 1. Portland Type IL: this cement is used to lower our carbon footprint through the use of limestone added to Portland cement. 2. Quartz Aggregates: Select aggregates are chosen based upon current and independent testing to confirm that they will not contribute to Alkali Silica Reaction (ASR). 3. Polymer Modified products with dry latex additive: These products all offer the advantage of a dry latex polymer which assists with proper curing of the repair mortar and enhances the bond strength to the substrate as well as internally for a longer lasting repair. 4. Freeze-Thaw Resistance: The polymer modified mortars that feature freeze-thaw cycling resistance will deliver a tremendous advantage with return on investment. These repair mortars are designed to resist the effects of freeze-thaw cycling and are proven to resist the effects of deicing salts. 5. Ease of Application: The compounds are engineered for easy mixing and application. In addition, the breadth of the line of repair and restoration mortars allows the end user to choose the ideal product for their application.

This LCA assumes the impacts from products manufactured in accordance with the standards outlined in this report. This LCA is a cradle-to-gate study and therefore, stages extending beyond the plant gate are not included in this LCA. Excluded stages include transportation of the manufactured material to the construction site; on-site construction processes and components; building (infrastructure) use and maintenance; and "end-of-life" effects.

## REPAIR AND RESTORATION COMPOUNDS DESIGN SUMMARY

The following tables provide a list of the repair and restoration compounds products considered in this EPD along with key performance parameters.

Table 1: Declared products with repair and restoration compounds considered in this environmental product declaration

Prod#	Unique name/ID	Short description	Product type
1	DressUp	Cementitious finishing compound	Repair and restoration compound
2	Duracrete II	Rapid setting, cementitious repair mortar	Repair and restoration compound



3	Duracrete II AG	Rapid setting, pre-extended repair mortar	Repair and restoration compound
4	Duracrete II FR	Rapid setting; fiber-reinforced, cementitious repair mortar	Repair and restoration compound
5	HiCap	Fast setting, carvable cementitious repair mortar	Repair and restoration compound
6	HiCap UW	Underwater cementitious repair mortar	Repair and restoration compound
7	PipeWipe	Cementitious finishing compound	Repair and restoration compound
8	Patch & Rub	Cementitious finishing compound	Repair and restoration compound
9	SureShot	Fiber reinforced shotcrete	Repair and restoration compound
10	SureShot WR	Fiber reinforced and microsilica enhanced shotcrete	Repair and restoration compound
11	Wall Patch	Fast setting cementitious finishing compound	Repair and restoration compound
12	AMG HiCap 5 UW Medium	Underwater, carvable, cementitious repair mortar	Repair & Restoration Compound
13	Duracrete II FT	Rapid setting, cementitious repair mortar	Repair & Restoration Compound
14	Duracrete II VOFT	Rapid setting, polymer modified concrete repair mortar	Repair & Restoration Compound
15	HiCap FT	Polymer modified, freeze-thaw resistant concrete repair mortar	Repair & Restoration Compound
16	HiCap Plus	A line of quick setting, cementitious patching & finishing compounds	Repair & Restoration Compound
17	Patch & Rub PM	Polymer-modified patching and finishing compound	Repair & Restoration Compound
18	Patchwell	Polymer-modified, featheredge concrete repair mortar	Repair & Restoration Compound
19	Patchwell BSL	Polymer-modified, vertical and overhead concrete repair mortar	Repair & Restoration Compound





20	Patchwell Deep	Polymer-modified, horizontal, deep placement concrete repair mortar	Repair & Restoration Compound
21	Patchwell Deep Light	Polymer-modified, light gray, horizontal concrete repair mortar	Repair & Restoration Compound
22	Patchwell Kit	Polymer-modified, featheredge concrete repair mortar	Repair & Restoration Compound
23	Patchwell Light	Polymer-modified, light gray, featheredge repair mortar	Repair & Restoration Compound
24	Patchwell VO	Polymer-modified, vertical and overhead concrete repair mortar	Repair & Restoration Compound
25	SureFlow 040	Self-leveling, polymer modified underlayment	Repair & Restoration Compound
26	SureFlow 042	Self-leveling, polymer modified wear topping	Repair & Restoration Compound
27	SurePlug Slow	Fast setting, non-shrinking, hydraulic cement compound	Repair & Restoration Compound
28	SurePlug Fast	Fast setting, non-shrinking, hydraulic cement compound	Repair & Restoration Compound
29	SurePlug Regular	Fast setting, non-shrinking, hydraulic cement compound	Repair & Restoration Compound
30	SurePlug ManHole Plug Slow	Fast setting, non-shrinking, hydraulic cement compound	Repair & Restoration Compound
31	SurePlug ManHole Plug Fast	Fast setting, non-shrinking, hydraulic cement compound	Repair & Restoration Compound

## REPAIR AND RESTORATION COMPOUNDS DESIGN COMPOSITION

The following table provides the breakdown (kg per functional unit) of the material composition of each repair and restoration compound product considered. All proprietary information has been withheld.

Table 3: **Material composition - per 1 kg of repair and restoration compounds: cementitious**

Prod#	Unique name/ID	Ingredients
1	DressUp	Aggregate Cement Pre-consumer material



<b>2</b>	Duracrete II	Aggregate Cement Pre-consumer material Accelerator
<b>3</b>	Duracrete II AG	Aggregate Cement Accelerator
<b>4</b>	Duracrete II FR	Aggregate Cement Accelerator
<b>5</b>	HiCap	Aggregate Cement Accelerator Pre-consumer material Extender Polymer
<b>6</b>	HiCap UW	Aggregate Cement Accelerator Pre-consumer material Extender Polymer
<b>7</b>	PipeWipe	Aggregate Cement Pre-consumer material Pigment
<b>8</b>	Patch & Rub	Aggregate Cement Pre-consumer material
<b>9</b>	SureShot	Aggregate Cement Pre-consumer material
<b>10</b>	SureShot WR	Aggregate Cement
<b>11</b>	Wall Patch	Aggregate Cement
<b>12</b>	AMG HiCap 5 UW Medium	Aggregate Cement
<b>13</b>	Duracrete II FT	Aggregate Cement Accelerator
<b>14</b>	Duracrete II VOFT	Aggregate Cement Accelerator Pre-consumer material Extender
<b>15</b>	HiCap FT	Aggregate Cement Accelerator Pre-consumer material
<b>16</b>	HiCap Plus	Aggregate Cement
<b>17</b>	Patch & Rub PM	Aggregate Cement Pre-consumer material Polymer
<b>18</b>	Patchwell	Aggregate





		Cement Pre-consumer material Polymer
<b>19</b>	Patchwell BSL	Aggregate Cement Accelerator Pre-consumer material Extender
<b>20</b>	Patchwell Deep	Aggregate Cement Pre-consumer material Polymer
<b>21</b>	Patchwell Deep Light	Aggregate Cement Pre-consumer material Polymer
<b>22</b>	Patchwell Kit	Aggregate Cement Polymer Water
<b>23</b>	Patchwell Light	Aggregate Cement Pre-consumer material Polymer
<b>24</b>	Patchwell VO	Aggregate Cement Accelerator Pre-consumer material Extender Polymer
<b>25</b>	SureFlow 040	Aggregate Cement Accelerator Extender
<b>26</b>	SureFlow 042	Aggregate Cement Accelerator Pre-consumer material Polymer
<b>27</b>	SurePlug Slow	Sand Cement Ash
<b>28</b>	SurePlug Fast	Sand Cement Ash
<b>29</b>	SurePlug Regular	Sand Cement Ash
<b>30</b>	SurePlug ManHole Plug Slow	Sand Cement Ash
<b>31</b>	SurePlug ManHole Plug Fast	Sand Cement Ash



## A1 RAW MATERIAL RECYCLED CONTENT AND MATERIAL LOSSES –

Kaufman Products is committed to using as much not linear inflows to their products as possible. Recycled content in their products includes the reuse of steel barrels and totes as well as proprietary ingredients. All recycled material in this study followed the "Polluter Pays" principle. A standard 2% material loss was used across all categories.

## SYSTEM BOUNDARIES

The following figure depicts the cradle-to-gate system boundary considered in this study:

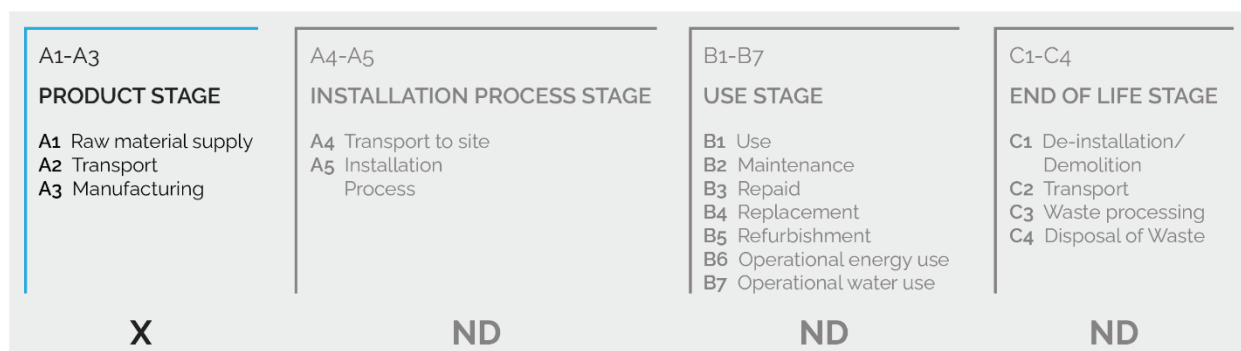


Figure 1: **General life cycle phases for consideration in a construction works system**

This is a Cradle-to-gate life cycle assessment and the following life cycle stages are included in the study:

- A1: Raw material supply (upstream processes) - Extraction, handling, and processing of the materials used in manufacturing the declared products in this LCA.
- A2: Transportation - Transportation of A1 materials from the supplier to the "gate" of the manufacturing facility (i.e. A3).
- A3: Manufacturing (core processes)- The energy and other utility inputs used to store, move, and manufacture the declared products and to operate the facility.

As according to the PCR, the following figure illustrates the general activities and input requirements for producing repair and restoration compound products and is not necessarily exhaustive.

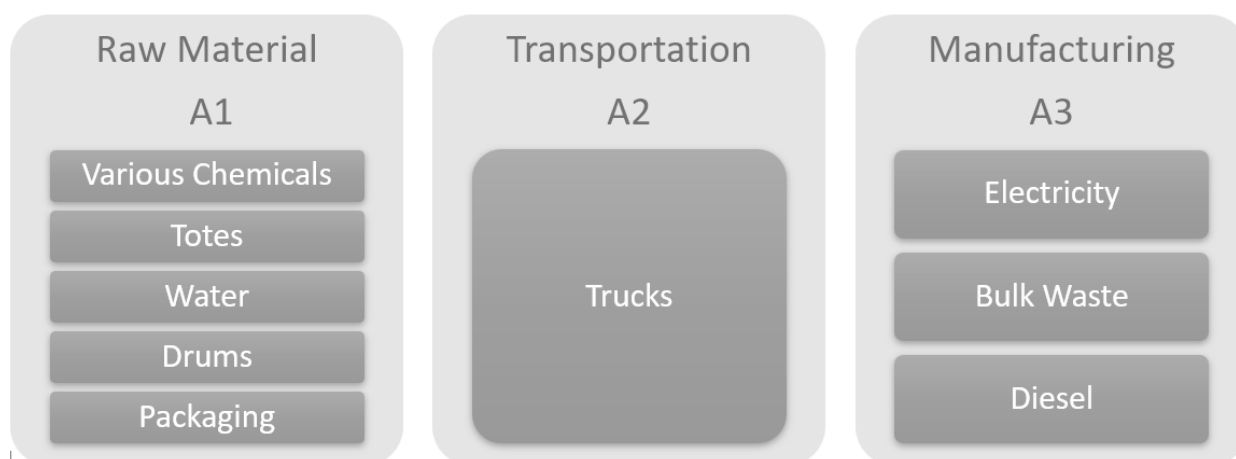


Figure 2: General system inputs considered in the product system and categorized by modules in scope

In addition, as according to the relevant PCR, the following requirements are excluded from this study:

- Production, manufacture, and construction of A3 building/capital goods and infrastructure.
- Production and manufacture of steel production equipment, steel delivery vehicles, earth-moving equipment, and laboratory equipment.
- Personnel-related activities (travel, furniture, office supplies).
- Energy use related to company management and sales activities.

For this LCA the manufacturing plant, owned and operated by Kaufman Products Inc., is located at their Kaufman Products facility in Northeast United States. All operating data is formulated using the actual data from Kaufman Products Inc.'s plant at the above location, including water, energy consumption and waste generation. All inputs for this system boundary are calculated for the plant.

This life cycle inventory was organized in a spreadsheet and was then input into an RStudio environment where pre-calculated LCIA results for relevant products/activities stemming from the ecoinvent v3.10 database and a local EPD database in combination with primary data from Kaufman Products Inc. were utilized. Explanations of the contribution of each data source to this study are outlined in the section 'Data Sources and Quality'. Further LCI details for each declared product are provided in the sections 'Detailed LCI tables' and 'Transport tables' of the detailed LCA report. A parameter uncertainty analysis was also performed where key statistical results (e.g. min/mean/max etc.) are provided in the detailed LCA report.

No known flows are deliberately excluded from this EPD.

## CUT-OFF CRITERIA

ISO 14044:2006 and the focus PCR requires the LCA model to contain a minimum of 95% of the total inflows (mass and energy) to the upstream and core modules be included in this study. The cut-off criteria were applied to all other processes unless otherwise noted above as follows. A 1% cut-off is considered for all renewable and non-renewable primary energy consumption and the total mass of inputs within a unit process where the total of the neglected inputs does not exceed 5%.

## DATA SOURCES AND DATA QUALITY ASSESSMENT

No recovered on-site energy occurs at this facility.

No re-used or recycled material for utilization on-site or off-site was reported at this facility.

The following statements explain how the above facility requirements/generation were derived:

**Raw material transport:** Kaufman provided all the raw material data for the reference year 2022. Raw material transportation is based on the actual distance from the manufacturer/distributor. The transportation was reported using Kaufman primary data that consisted of the actual distance, mode of transport, and location in the city, state, and country.

**Electricity:** Electricity usage for the study was based on primary data from the utility bills for the reporting period. The products covered in this EPD consist of 99% of the overall product volume; therefore, all electricity was allocated based on that 99% figure.

**Process/space heating:** This facility does not use natural gas on-site.

**Fuel required for machinery:** Machinery at this facility uses either electricity, reported in the utility bills, or diesel, which was also calculated from direct purchases records for the 2022 reference year.

**Waste generation:** All waste generation values were taken from primary waste hauling records and then confirmed by Kaufman personnel. Transportation defaults were used because the driver's route and ultimate final destination are unknown. Therefore, the exact mileage could not be confirmed by the waste hauler.

**Recovered energy:** No on-site energy is recovered on site.

**Recycled/reused material/components:** Default material losses, 2%, were used.

**Module A1 material losses:** Diesel combustion emissions on-site were assumed with a default ecoinvent process for burning diesel in a building machine.

**Direct A3 emissions accounting:** NA

The following tables depict a list of assumed life cycle inventory utilized in the LCA modeling to generate the impact results across the life cycle modules in scope. An assessment of the quality of each LCI activities utilized from various sources is also provided.



Table 5: LCI inputs assumed for module A3

Input	LCI.activity	Data.source	Geo	Year	Technology	Time	Geography	Reliability	Completeness
<b>Bulk waste</b>	process-specific burdens, residual material landfill/process-specific burdens, residual material landfill/RoW/kg	ecoinvent v3.10 in 2024	Maryland	2024	2	3	2	3	3
<b>Diesel</b>	diesel, burned in building machine/diesel, burned in building machine/GLO/MJ	ecoinvent v3.10 in 2024	Maryland	2024	2	3	2	3	3
<b>Electricity</b>	market for electricity, medium voltage/electricity, medium voltage/US-SERC/kWh	ecoinvent v3.10 in 2024	Maryland	2024	2	3	2	3	3
<b>Pallet</b>	market for EUR-flat pallet/EUR-flat pallet/RoW/unit	ecoinvent v3.10 in 2024	Maryland	2024	2	3	2	3	3
<b>Paper bag</b>	market for paper sack/paper sack/RoW/kg	ecoinvent v3.10 in 2024	Maryland	2024	2	3	2	3	3
<b>Plastic granules for blow moulding</b>	market for polyethylene terephthalate, granulate, bottle grade, recycled/polyethylene terephthalate, granulate, bottle grade, recycled/RoW/kg	ecoinvent v3.10 in 2024	Multiple States	2024	2	3	2	3	3
<b>Plastic pail</b>	blow moulding/blow moulding/RoW/kg	ecoinvent v3.10 in 2024	Maryland	2024	2	3	2	3	3
<b>Plastic wrap</b>	market for packaging film, low density polyethylene/packaging film, low density polyethylene/GLO/kg	ecoinvent v3.10 in 2024	Maryland	2024	2	3	2	3	3
<b>Supersack</b>	market for textile, nonwoven polypropylene/textile,	ecoinvent v3.10 in 2024	Maryland	2024	2	3	2	3	3



nonwoven polypropylene/GLO/kg									
----------------------------------	--	--	--	--	--	--	--	--	--

## DATA QUALITY ASSESSMENT

Data quality/variability requirements, as specified in the PCR, are applied. This section describes the achieved data quality relative to the ISO 14044:2006 requirements. Data quality is judged based on its precision (measured, calculated or estimated), completeness (e.g., unreported emissions), consistency (degree of uniformity of the methodology applied within a study serving as a data source) and representativeness (geographical, temporal, and technological).

**Precision:** Through measurement and calculation, the manufacturers collected and provided primary data on their annual production. For accuracy, the LCA practitioner and 3rd Party Verifier validated the plant gate-to-gate data.

**Completeness:** All relevant specific processes, including inputs (raw materials, energy and ancillary materials) and outputs (emissions and production volume) were considered and modeled to represent the specified and declared products. The majority of relevant background materials and processes were taken from ecoinvent v3.10 LCI datasets where relatively recent region-specific electricity inputs were utilized. The most relevant EPDs requiring key A1 inputs were also utilized where readily available.

**Consistency:** To ensure consistency, the same modeling structure across the respective product systems was utilized for all inputs, which consisted of raw material inputs and ancillary material, energy flows, water resource inputs, product and co-products outputs, returned and recovered concrete curing compounds products, emissions to air, water and soil, and waste recycling and treatment. The same background LCI datasets from the ecoinvent v3.10 database were used across all product systems. Crosschecks concerning the plausibility of mass and energy flows were continuously conducted. The LCA team conducted mass and energy balances at the plant and selected process level to maintain a high level of consistency.

**Reproducibility:** Internal reproducibility is possible since the data and the models are stored and available in a machine readable project file for all foreground and background processes, and in Labeling Sustainability's proprietary concrete curing compounds LCA calculator\* for all production facility and product-specific calculations. A considerable level of transparency is provided throughout the detailed LCA report as the specifications and material quantity make-up for the declared products are presented and key primary and secondary LCI data sources are summarized. The provision of more detailed publicly accessible data to allow full external reproducibility was not possible due to reasons of confidentiality.

Labeling Sustainability has developed a proprietary tool that allows the calculation of PCR-compliant LCA results for concrete curing compounds product designs. The tool auto-calculates results by scaling base-unit Technosphere inputs (i.e. 1 kg sand, 1 kWh electricity, etc.) to replicate the reference flow conversions that take place in any typical LCA software like openLCA or SimaPro. The tool was tested against several LCAs performed in openLCA and the tool generated identical results to those realized in openLCA across every impact category and inventory metric (where comparisons could be readily made).

**Representativeness:** The representativeness of the data is summarized as follows.



- Time related coverage of the manufacturing processes' primary collected data from 2022-01-01 to 2022-12-31.
- Upstream (background) LCI data was either the PCR specified default (if applicable) or more appropriate LCI datasets as found in the country-adjusted ecoinvent v3.10 database.
- Geographical coverage for inputs required by the A3 facility(ies) is representative of its region of focus; other upstream and background processes are based on US, North American, or global average data and adjusted to regional electricity mixes when relevant.
- Technological coverage is typical or average and specific to the participating facilities for all primary data.

## ENVIRONMENTAL INDICATORS AND INVENTORY METRICS

Per the PCR, this EPD supports the life cycle impact assessment indicators and inventory metrics as listed in the tables below. As specified in the PCR, the most recent US EPA Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI), impact categories were utilized as they provide a North American context for the mandatory category indicators to be included in the EPD. Additionally, the PCR requires a set of inventory metrics to be reported with the LCIA indicators (see tables below).

Table 6: Life cycle impact categories and life cycle inventory metrics

ID	LCIA.indicators	Abbreviations	Units
1	Climate change: global warming potential (GWP100)	GWP	kg CO <sub>2</sub> -eq
2	Ozone depletion: ozone depletion potential (ODP)	ODP	kg CFC-11-eq
3	Acidification: acidification potential (AP)	AP	kg SO <sub>2</sub> -eq
4	Eutrophication: eutrophication potential	EP	kg N-eq
5	Smog formation potential	SFP	kg O <sub>3</sub> -eq
6	Energy resources: non-renewable: abiotic depletion potential (ADP): fossil fuels	ADP <sub>fossil</sub>	MJ
<b>Inventory metrics</b>			
7	Inventory indicators ISO21930: Cumulative Energy Demand - renewable energy resources	RPRE	MJ
8	Inventory indicators ISO21930: Renewable primary resources with energy content used as material (i.e., PERM)	PRM	MJ
9	Inventory indicators ISO21930: Cumulative Energy Demand - non-renewable energy resources	NRPRE	MJ
10	Inventory indicators ISO21930: Non-renewable primary resources with energy content used as material (i.e., PENRM)	NRPRM	kg
11	Inventory indicators ISO21930: use of secondary material	SM	MJ
12	Inventory indicators ISO21930: use of renewable secondary fuels	RSF	MJ
13	Inventory indicators ISO21930: recovered energy	RE	MJ
14	Inventory indicators ISO21930: use of net fresh water	FW	m <sup>3</sup>
15	Inventory indicators ISO21930: hazardous waste disposed	HWD	kg
16	Inventory indicators ISO21930: non-hazardous waste disposed	NHWD	kg





17	Inventory indicators ISO21930: high-level radioactive waste disposed	HLRW	kg
18	Inventory indicators ISO21930: intermediate and low-level radioactive waste disposed	ILLRW	kg
19	Inventory indicators ISO21930: materials for recycling	MR	kg
20	Inventory indicators ISO21930: materials for energy recovery	MER	kg
21	Inventory indicators ISO21930: exported energy - electricity	EEel	MJ
22	Inventory indicators ISO21930: exported energy - heat	EEheat	MJ

It should be noted that emerging LCA impact categories and inventory items are still under development and can have high levels of uncertainty that preclude international acceptance pending further development. Use caution when interpreting data in any of the following categories.

- Renewable primary energy resources as energy (fuel);
- Renewable primary resources as material;
- Non-renewable primary resources as energy (fuel);
- Non-renewable primary resources as material;
- Secondary Materials;
- Renewable secondary fuels;
- Non-renewable secondary fuels;
- Recovered energy;
- Abiotic depletion potential for non-fossil mineral resources.
- Land use related impacts, for example on biodiversity and/or soil fertility;
- Toxicological aspects;
- Emissions from land use change [GWP 100 (land-use change)];
- Hazardous waste disposed;
- Non-hazardous waste disposed;
- High-level radioactive waste;
- Intermediate and low-level radioactive waste;
- Components for reuse;
- Materials for recycling;
- Materials for energy recovery;
- Recovered energy exported from the product system.



## TOTAL IMPACT SUMMARY

The life cycle impact interpretations for various concrete products have been grouped by product categories, providing insights into the environmental impacts of individual products and enabling the development of group-wide mitigation strategies.

### Concrete Curing and Restoration Compounds

#### Categories:

##### 1. Cement-Intensive Products

- **Products:** Patch & Rub, SurePlug Variants, Dress Up, Duracrete II series, HiCap, PipeWipe, SureShot series, Wall Patch, Patchwell series, SureFlow series, AMG HiCap 5 UW Medium.
- **Mitigation Strategies:** Utilizing lower-impact cement alternatives, optimizing cement use, enhancing logistics, and implementing efficient manufacturing processes.

##### 2. Cement and Polymer Focused Products

- **Products:** Patchwell Kit, Patch & Rub PM, Patchwell VO.
- **Mitigation Strategies:** Reducing cement usage, investigating environmentally friendly polymer alternatives, enhancing recyclability or biodegradability of polymers.

##### 3. Calcium Aluminate Cement Prominent Products

- **Products:** Duracrete II series, HiCap series, SureFlow series, AMG HiCap 5 UW Medium.
- **Mitigation Strategies:** Replacing Calcium Aluminate Cement with sustainable alternatives, optimizing formulation, and innovative manufacturing processes.

#### Common Themes:

- **Broad-Based Approach:** Reducing the impact of cement production and transportation is crucial across all product groups.
- **Sustainable Sourcing and Material Use:** Using alternative materials and optimizing logistic networks are essential.
- **Targeted Research:** Investigating sustainable alternatives for specific high-impact materials like polymers or Calcium Aluminate Cement.

By addressing these key areas, substantial reductions in GWP and overall environmental impact can be achieved across these product categories.

The following table reports the total LCA results for each product produced at the given facility on a 1 kg of repair and restoration compounds basis.

Table 7: Total life cycle (across modules in scope) impact results for All declared products, assuming the geometric mean point values on a per 1 kg of repair and restoration compounds: cementitious product basis.

#### a) Midpoint Impact Categories:

Indicator/LCI Metric	GWP	ODP	AP	EP	SFP	ADPfossil
Unit	kg CO <sub>2</sub> -eq	kg CFC-11-eq	kg SO <sub>2</sub> -eq	kg N-eq	kg O <sub>3</sub> -eq	MJ
DressUp	0.408	3.64e-09	0.00117	0.000466	0.0283	3.03



Duracrete II	0.206	2.45e-09	0.00061	0.000269	0.0151	1.7
Duracrete II AG	0.319	3.42e-09	0.000882	0.000376	0.021	2.58
Duracrete II FR	0.231	3.01e-09	0.000687	0.000294	0.0173	1.95
HiCap	0.674	6.81e-09	0.00196	0.0013	0.0441	5.85
HiCap UW	0.562	5.42e-09	0.00153	0.000592	0.0366	4.06
PipeWipe	0.644	5.48e-09	0.00185	0.000744	0.0418	4.52
Patch & Rub	0.302	2.98e-09	0.000872	0.00036	0.0212	2.32
SureShot	0.363	3.43e-09	0.00105	0.000425	0.0254	2.82
SureShot WR	0.372	3.51e-09	0.00111	0.00045	0.0272	2.9
Wall Patch	1.06	8.65e-09	0.0032	0.00226	0.065	8.53
AMG HiCap 5 UW Medium	0.562	5.47e-09	0.00155	0.000601	0.0373	4.11
Duracrete II FT	0.331	3.49e-09	0.000938	0.000382	0.0228	2.54
Duracrete II VOFT	0.354	3.72e-09	0.000961	0.000403	0.0229	2.9
HiCap FT	0.386	3.92e-09	0.00111	0.000571	0.0254	3.09
HiCap Plus	0.746	7.44e-09	0.00214	0.0014	0.0483	6.39
Patch & Rub PM	0.359	4.73e-09	0.00108	0.00112	0.024	3.88
Patchwell	0.495	5.59e-09	0.00144	0.00118	0.0325	4.69
Patchwell BSL	0.487	4.65e-09	0.00134	0.00054	0.0319	3.81
Patchwell Deep	0.448	4.94e-09	0.0013	0.000993	0.0297	4.12
Patchwell Deep Light	0.595	6.02e-09	0.0017	0.00114	0.0391	5.11
Patchwell Kit	1.07	5.35e-09	0.00394	0.0015	0.0624	11.9
Patchwell Light	0.426	5.15e-09	0.0013	0.00113	0.0297	4.34
Patchwell VO	0.577	6.54e-09	0.00162	0.00132	0.0362	5.49
SureFlow 040	0.415	5.49e-09	0.00122	0.00106	0.0268	4.19
SureFlow 042	0.378	5.35e-09	0.00116	0.00117	0.0247	4.25
SurePlug Slow	0.968	8.22e-09	0.00310	0.00262	0.0556	8.35
SurePlug Fast	0.991	8.20e-09	0.00313	0.00265	0.0594	8.52
SurePlug Regular	0.989	8.40e-09	0.00312	0.00264	0.0594	8.52
SurePlug ManHole Plug Slow	0.705	5.95e-09	0.00208	0.00127	0.0444	5.5
SurePlug ManHole Plug Fast	0.72	6.06e-09	0.00213	0.0013	0.0453	5.61

## b) Resource Inventory Metrics:

Indicator/LCI Metric	RPRE	PRM	NRPRE	NRPRM	SM	RSF	RE	FW
Unit	MJ	MJ	MJ	kg	MJ	MJ	MJ	m3
DressUp	0.282	0.0589	0.285	0.0151	0.00108	0.000125	0.00273	0.000829
Duracrete II	0.46	0.0699	0.231	0.0215	0.00216	0.000108	0.00264	0.000541
Duracrete II AG	0.525	0.0723	0.259	0.0226	0.00274	0.000115	0.00316	0.000664
Duracrete II FR	0.719	0.0802	0.235	0.0256	0.00387	4.57e-05	0.00395	0.000589
HiCap	0.389	0.0571	0.393	0.542	0.0018	4.48e-05	0.00525	0.00167
HiCap UW	0.864	0.0857	0.32	0.0302	0.00501	0.000135	0.00583	0.00101
PipeWipe	0.35	0.058	0.353	0.015	0.0016	0.000114	0.00449	0.00145
Patch & Rub	0.336	0.0624	0.255	0.0173	0.00141	0.000109	0.00253	0.000684
SureShot	0.266	0.056	0.269	0.0152	0.00102	2.98e-05	0.00252	0.00079
SureShot WR	0.276	0.0571	0.279	0.0211	0.00103	3.42e-05	0.00268	0.000824



Wall Patch	0.958	0.0312	0.976	2.45	0.121	0.0013	0.00809	0.00262
AMG HiCap 5 UW Medium	0.872	0.084	0.319	0.0294	0.00508	6.05e-05	0.00593	0.00102
Duracrete II FT	0.572	0.0739	0.262	0.0237	0.00298	0.000116	0.00367	0.00072
Duracrete II VOFT	0.43	0.0666	0.265	0.0206	0.00225	0.000111	0.00299	0.000744
HiCap FT	0.634	0.0626	0.315	0.322	0.0182	0.00025	0.00419	0.000886
HiCap Plus	0.402	0.0553	0.406	0.579	0.00198	4.32e-05	0.0057	0.0018
Patch & Rub PM	0.378	0.0622	0.298	0.721	0.0017	0.000106	0.00295	0.00115
Patchwell	0.37	0.061	0.332	0.65	0.00172	0.000112	0.00348	0.00131
Patchwell BSL	0.419	0.0633	0.302	0.0245	0.00217	4.42e-05	0.00352	0.00094
Patchwell Deep	0.341	0.0597	0.311	0.509	0.00151	0.000106	0.00315	0.00116
Patchwell Deep Light	0.367	0.0571	0.346	0.51	0.00177	3.72e-05	0.00391	0.00137
Patchwell Kit	0.485	0	0.493	2.88	0.054	0.000204	0.00464	0.00337
Patchwell Light	0.355	0.0575	0.312	0.652	0.00161	3.31e-05	0.00323	0.00123
Patchwell VO	0.451	0.0634	0.35	0.722	0.00241	0.000115	0.00402	0.00144
SureFlow 040	0.736	0.0811	0.326	0.591	0.00401	0.000173	0.00552	0.0013
SureFlow 042	0.592	0.0725	0.313	0.727	0.00325	0.000119	0.00393	0.00134
SurePlug Slow	1.24	0.0457	1.18	3.26	0.157	0.00170	0.00863	0.00291
SurePlug Fast	1.26	0.0450	1.18	3.26	0.157	0.00168	0.00881	0.00295
SurePlug Regular	1.25	0.0412	1.18	3.26	0.157	0.00158	0.00882	0.00297
SurePlug ManHole Plug Slow	0.583	0.0186	0.495	1.11	0.0546	0.000582	0.00563	0.00169
SurePlug ManHole Plug Fast	0.58	0.0181	0.501	1.12	0.0545	0.000581	0.0057	0.00175

## c) Waste/Output Inventory Metrics:

Indicator/LCI Metric	HWD	NHWD	HLRW	ILLRW	MR	MER	EEel	EEheat
Unit	kg	kg	kg	kg	kg	kg	MJ	MJ
DressUp	0.00971	0.203	4.3e-07	1.14e-06	7.45e-05	2.63e-07	0.000629	0.00209
Duracrete II	0.00493	0.109	2.2e-07	5.63e-07	6.2e-05	0.00268	0.00184	0.00134
Duracrete II AG	0.00755	0.159	3.13e-07	7.69e-07	7.19e-05	0.00313	0.0022	0.00159
Duracrete II FR	0.00551	0.121	3.13e-07	9.18e-07	6.88e-05	0.00568	0.00362	0.00149
HiCap	0.0187	0.39	9.51e-07	2.55e-06	0.00011	5.47e-07	0.00138	0.00387
HiCap UW	0.0128	0.262	5.29e-07	1.3e-06	9.25e-05	0.0064	0.00433	0.0028
PipeWipe	0.0169	0.353	6.33e-07	1.51e-06	9.46e-05	4.79e-07	0.000927	0.00355
Patch & Rub	0.00715	0.152	2.98e-07	7.44e-07	6.7e-05	0.000958	0.000995	0.00172
SureShot	0.00869	0.183	3.88e-07	1.03e-06	7.22e-05	2.25e-07	0.000575	0.00194



SureShot WR	0.00914	0.197	4.86e-07	1.44e-06	7.52e-05	2.23e-07	0.000701	0.00196
Wall Patch	0.0376	1.22	2.17e-06	4.97e-06	0.0125	2.25e-06	0.00255	0.00549
AMG HiCap 5 UW Medium	0.013	0.267	5.98e-07	1.6e-06	9.44e-05	0.00651	0.00447	0.00277
Duracrete II FT	0.00768	0.162	3.26e-07	8.13e-07	7.24e-05	0.00364	0.00252	0.00188
Duracrete II VOFT	0.00821	0.172	3.43e-07	8.46e-07	7.74e-05	0.00195	0.0016	0.00178
HiCap FT	0.0105	0.275	5.24e-07	1.26e-06	0.00159	0.00371	0.00285	0.00212
HiCap Plus	0.0204	0.42	9.86e-07	2.56e-06	0.000114	5.98e-07	0.00144	0.00426
Patch & Rub PM	0.0111	0.228	4.97e-07	1.19e-06	8.19e-05	0.000959	0.00124	0.0019
Patchwell	0.014	0.283	5.95e-07	1.42e-06	9.11e-05	0.000479	0.00111	0.00245
Patchwell BSL	0.0114	0.239	5.16e-07	1.37e-06	8.45e-05	0.00139	0.00152	0.00227
Patchwell Deep	0.0123	0.252	5.23e-07	1.26e-06	8.46e-05	0.000382	0.000964	0.00226
Patchwell Deep Light	0.0158	0.318	6.69e-07	1.64e-06	9.64e-05	0.000283	0.00111	0.00285
Patchwell Kit	0.0243	0.615	1.16e-06	2.8e-06	0.00551	1.03e-06	0.00141	0.00319
Patchwell Light	0.0128	0.264	6.86e-07	1.93e-06	8.81e-05	0.00053	0.00124	0.00208
Patchwell VO	0.016	0.321	6.8e-07	1.62e-06	9.86e-05	0.00121	0.00163	0.00263
SureFlow 040	0.0124	0.259	6.17e-07	1.54e-06	9.29e-05	0.00484	0.00362	0.00291
SureFlow 042	0.0125	0.252	5.59e-07	1.36e-06	9.11e-05	0.00329	0.00262	0.00199
SurePlug Slow	1.24	0.0457	1.18	3.26	0.159	0.00170	0.00863	0.00291
SurePlug Fast	1.23	0.0455	1.17	3.26	0.159	0.00168	0.00864	0.00290
SurePlug Regular	1.23	0.0412	1.18	3.27	0.158	0.00158	0.00882	0.00297
SurePlug ManHole Plug Slow	0.583	0.0186	0.495	1.11	0.0546	0.000582	0.00563	0.00169
SurePlug ManHole Plug Fast	0.58	0.0181	0.501	1.12	0.0545	0.000581	0.0057	0.00175

## ADDITIONAL ENVIRONMENTAL INFO

No regulated substances of very high concern are utilized on site.



## REFERENCES

### ISO Standards:

- ISO 6707-1: 2014 Buildings and Civil Engineering Works - Vocabulary - Part 1: General Terms
- ISO 14021:1999 Environmental Labels and Declarations - Self-declared Environmental Claims (Type II Environmental Labeling)
- ISO 14025:2006 Environmental Labels and Declarations - Type III Environmental Declarations - Principles and Procedures
- ISO 14040:2006 Environmental Management - Life Cycle Assessment - Principles and Framework
- ISO 14044:2006 Environmental Management - Life Cycle Assessment - Requirements and Guidelines
- ISO 14067:2018 Greenhouse Gases – Carbon Footprint of Products – Requirements and Guidelines for Quantification
- ISO 14050:2009 Environmental Management - Vocabulary
- ISO 21930:2017 Sustainability in Building Construction - Environmental Declaration of Building Products

### EN Standards:

- EN 16757 Sustainability of construction works - Environmental product declarations – Product Category Rules for concrete and concrete elements.
- EN 15804 Sustainability of construction works - Environmental product declarations -Core rules for the product category of construction products.

### Other References:

- USGBC LEED v4 for Building Design and Construction, 11 Jan 2019 available at <https://www.usgbc.org/resources/pcr-committee-process-resources-part-b>
- USGBC PCR Committee Process & Resources: Part B, USGBC, 7 July 2017 available at <https://www.usgbc.org/resources/pcr-committee-process-resources-part-b>.
- US EPA (2020) Advancing Sustainable Materials Management: 2018 Fact Sheet, [https://www.epa.gov/sites/production/files/2021-01/documents/2018\\_ff\\_fact\\_sheet\\_dec\\_2020\\_fnl\\_508.pdf](https://www.epa.gov/sites/production/files/2021-01/documents/2018_ff_fact_sheet_dec_2020_fnl_508.pdf)

